



Pneumate Series 109 Model 86 Powered Coupler

FEATURES

- Evacuation & Charging
- Automatic disconnect capability
- Automatic operation, upon connection to fitting
- High vacuum and refrigerant flow rates
- Air operated
- Lightweight



**J639 Low Side
Vacuum & Charge**



The Production Control Units Pneumate Powered Coupler is the interface adapter for evacuation systems. The Pneumate Process Coupler is designed for easy installation on to the HFC-134a low side process fittings. Use the Pneumate Part Number 109006-001, for evacuation or refrigerant charging, with de minimus refrigerant loss to atmosphere from the coupler with the additional benefit of automatic disconnect at cycle completion.


Coupler operation is controlled automatically by the process equipment. The operator only has to locate the Coupler on the process fitting. The process equipment then causes the coupler to clamp, seal, and initiate the cycle including evacuation, vacuum check or refrigerant charging. After cycle completion the process fitting seal is resealed and the coupler disconnects.

The clamping mechanism used is the time proven ball lock method. The six hardened steel balls which are constrained in the charge gate body are secured onto the ball groove taper on the process fitting by the locking sleeve. Securing the balls on the taper assures positive force on the nose seal.

The Pneumate Process Charging Coupler can be easily adapted to all PCU "PLC" or relay controlled charging equipment or application to other competitive evacuation systems. Electrical controlled pendant or mechanical air valve available to suit your application.

Contact our Order Department (1-937-299-5594) to find out how our PCU Process Couplers can save you time and money.

Pneumate Series 109-Model 86 Powered Coupler

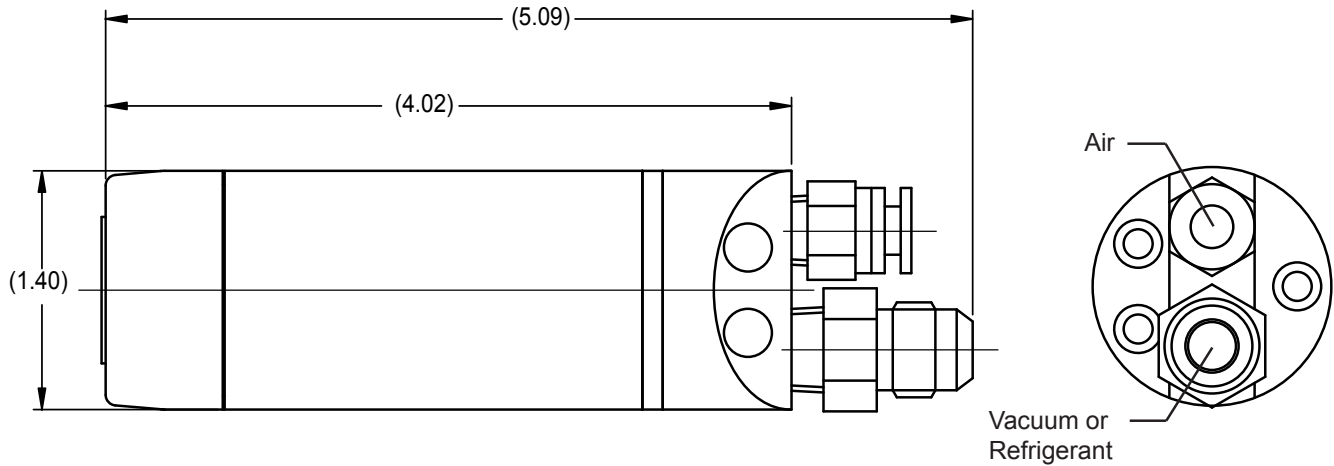

STANDARD STOCK PART NUMBER: 109006-001

TECHNICAL SPECIFICATIONS:

Weight 1.15 lbs (0.5 kg)	Stem extension.....7.8mm to 8.3mm Process fitting nose seal.....M o l d e d Process fitting clamp system.....P C U B a l L o c
Vacuum rangeATM - 10 microns Vacuum flow2.8 SCFM Refrigerant HFC-134a at 600 PSIG max (42kg/cm ²) Refrig/Vacuum port fitting 3/8" JIC Flare	Oil compatibility Polyolester or PAG
Air pilot..... Clamp Air Air supply pressure60 PSIG (4.2 kg/cm ²) Air port fitting 1/4" dia. one touch connectors Process fitting compatibility 3/8" SAE Flow Rate 0.41 Cv	

* Please contact PCU Engineering for custom power couplers to fit your application.



Production Control Units, Inc.

2280 West Dorothy Lane, Dayton, Ohio 45439-1892 Phone (937) 299-5594 FAX: (937) 299-4843
 ©Production Control Units, Inc. U.S.A. Web: www.pcuinc.com